




# de l'imprimante 3D à la fabrication additive

Les ateliers de l'information  
Mardi 15 Avril 2014

Pierre-Marie Boitel ( GI-Nova / Génie Industriel)



# Gi-Nova

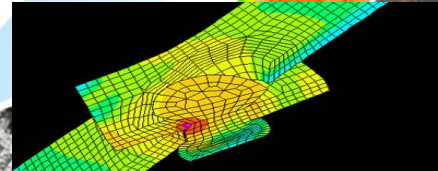

Grenoble



GRENOBLE 1



UNIVERSITÉ  
JOSEPH FOURIER  
SCIENCES. TECHNOLOGIE. SANTÉ

## Prototyping

Physical prototyping facilities  
Rapid Prototyping, Machining,  
printer 3D, EBM

## Virtual reality

Stereoscopic 3D,  
haptic arm  
Holographics LCD



## retroDesign

Re-design with  
the laser tracker



## LEAN

Fab-Lab industrialization  
training & research platform  
!It's a game!



- *L'apparition et la d mocratisation de nouvelles technologies de fabrication 3D par technologie additive bouleverse de mani re importante notre approche de la conception et de la fabrication de produit. Nous pr senterons les diff rentes technologies d'impression 3D, ou plus g n ralement ce que l'on nomme la fabrication additive. Nous d velopperons aussi les quelques domaines impact s par ces nouvelles technologies: Le design des pi ces, le processus de conception, l'open source des produits (le mouvement Reprap) et les notions de fabrications distribu es (exemple 3DHubs)*


# Introduction

- *Additive manufacturing (AM) processes have been commonly used for rapid prototyping purposes during the last 30 years.*
- *These technologies can now be used to manufacture metallic parts.*
- *This breakthrough in manufacturing technology makes possible the fabrication of new shapes and geometrical features.*
- *They allow net-shape manufacturing of complex parts.*
- *They should provide improvements in terms of time-to-market, ecological impact and design compared to traditional industrial processes.*



# Introduction


- **From soustractive manufacturing**
  - Several manufacturing operations
  - Upto 95% of material removal
- **To additive manufacturing**
  - Reduced material removal rate
  - More freedom in parts shape design
  - Less tooling

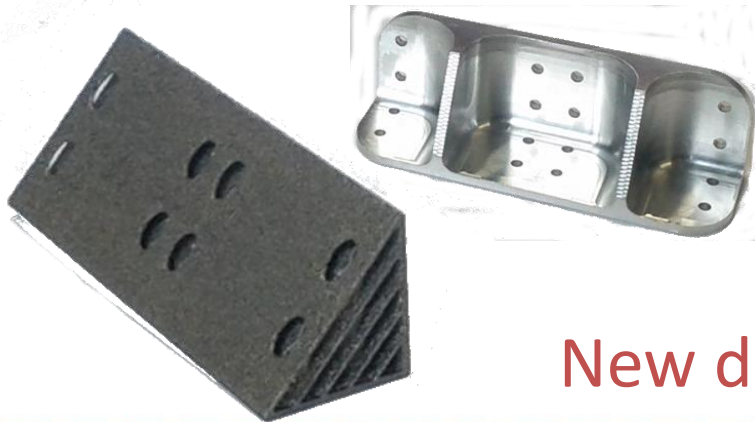

**New design paradigm**

# Reduced material removal rate


A ronautique  
Buy to Fly = 3   20

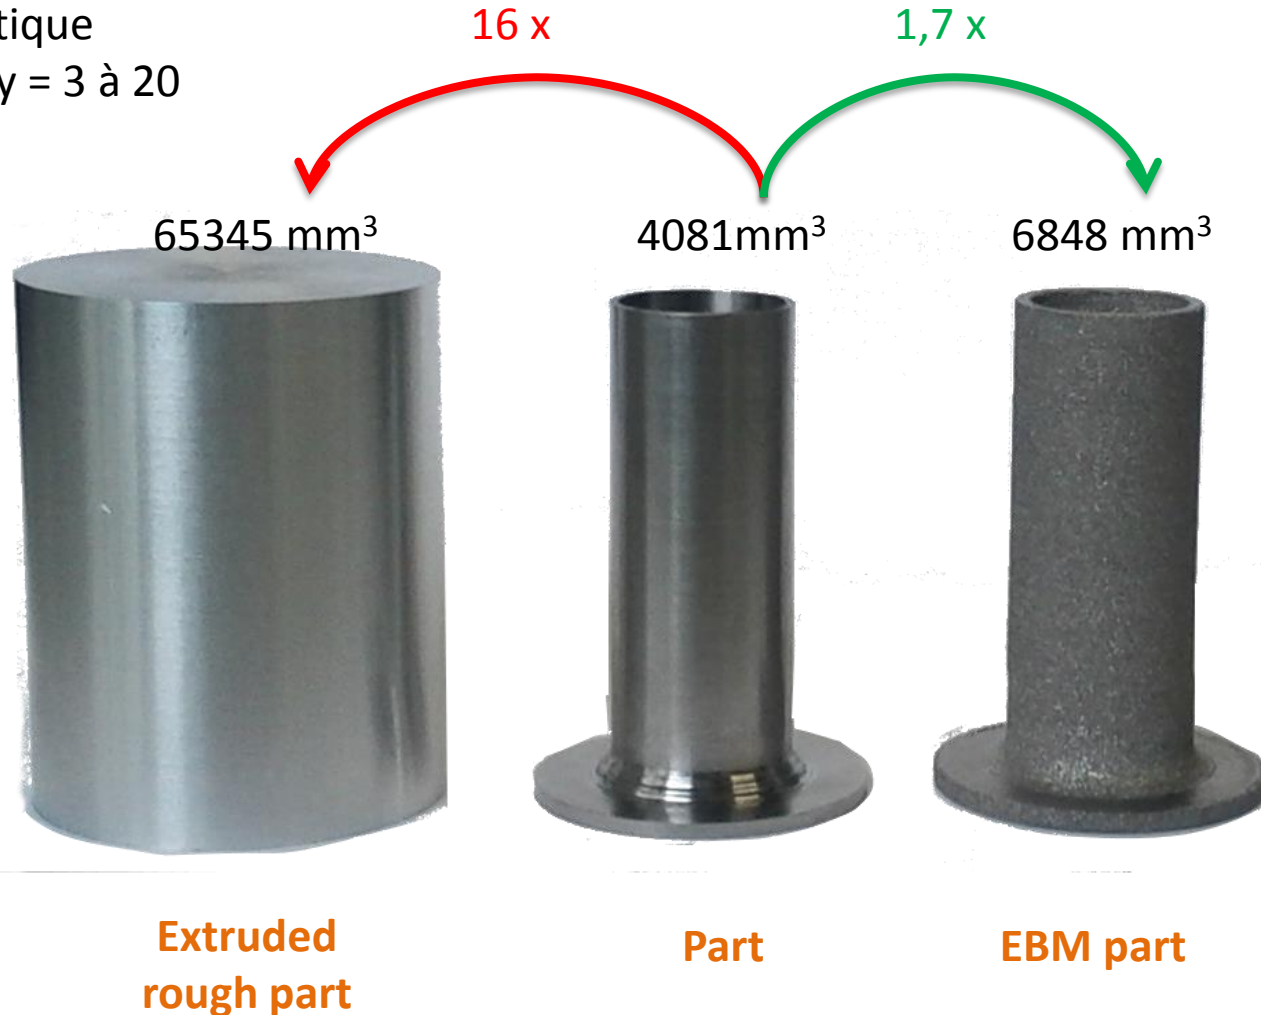

# Some Key date

- 1986 –3DSystem company
- 1988 First additive manufacturing technologie. Use a stereolithography process (60 patents)
- DTM corporation -> process SLS - Selective Laser Sintering
- STL format - 3D System company ( Standard Tessellation Language) or (STereoLithography)
- 1988 : Stratasys -> process FDM - Fused Deposition Modeling
- 1993 : MIT-> process powder and inkjet printing.
- 1995 : Z corporation buy patents to process powder
- 1996 : use of the term : printer 3D
- 1999 : PolyJet by Objet Ltd.
- 2005 : beginning RepRap project ( Adrian Bowyer)
- 2009 : MakerBot : Bre Pettis, Adam Mayer et Zachary Smith
- 2011 : 15000 marketed printer3D
- 2012: 38000 marketed new printer 3D
- 2013: 56000 printer3D
- 2014 : 98000 printer3D (estimate !)
- 1990 - Binded selective laser sintering (SLS)
- 2000 - Direct Metal Laser sintering (DMLS)
- 2000 - Laser selective melting (SLM)
- 2006 - Electron beam melting (EBM)
- Direct metallic deposition (DMD/CLAD)
- 2014 DMG Mori Seiki...



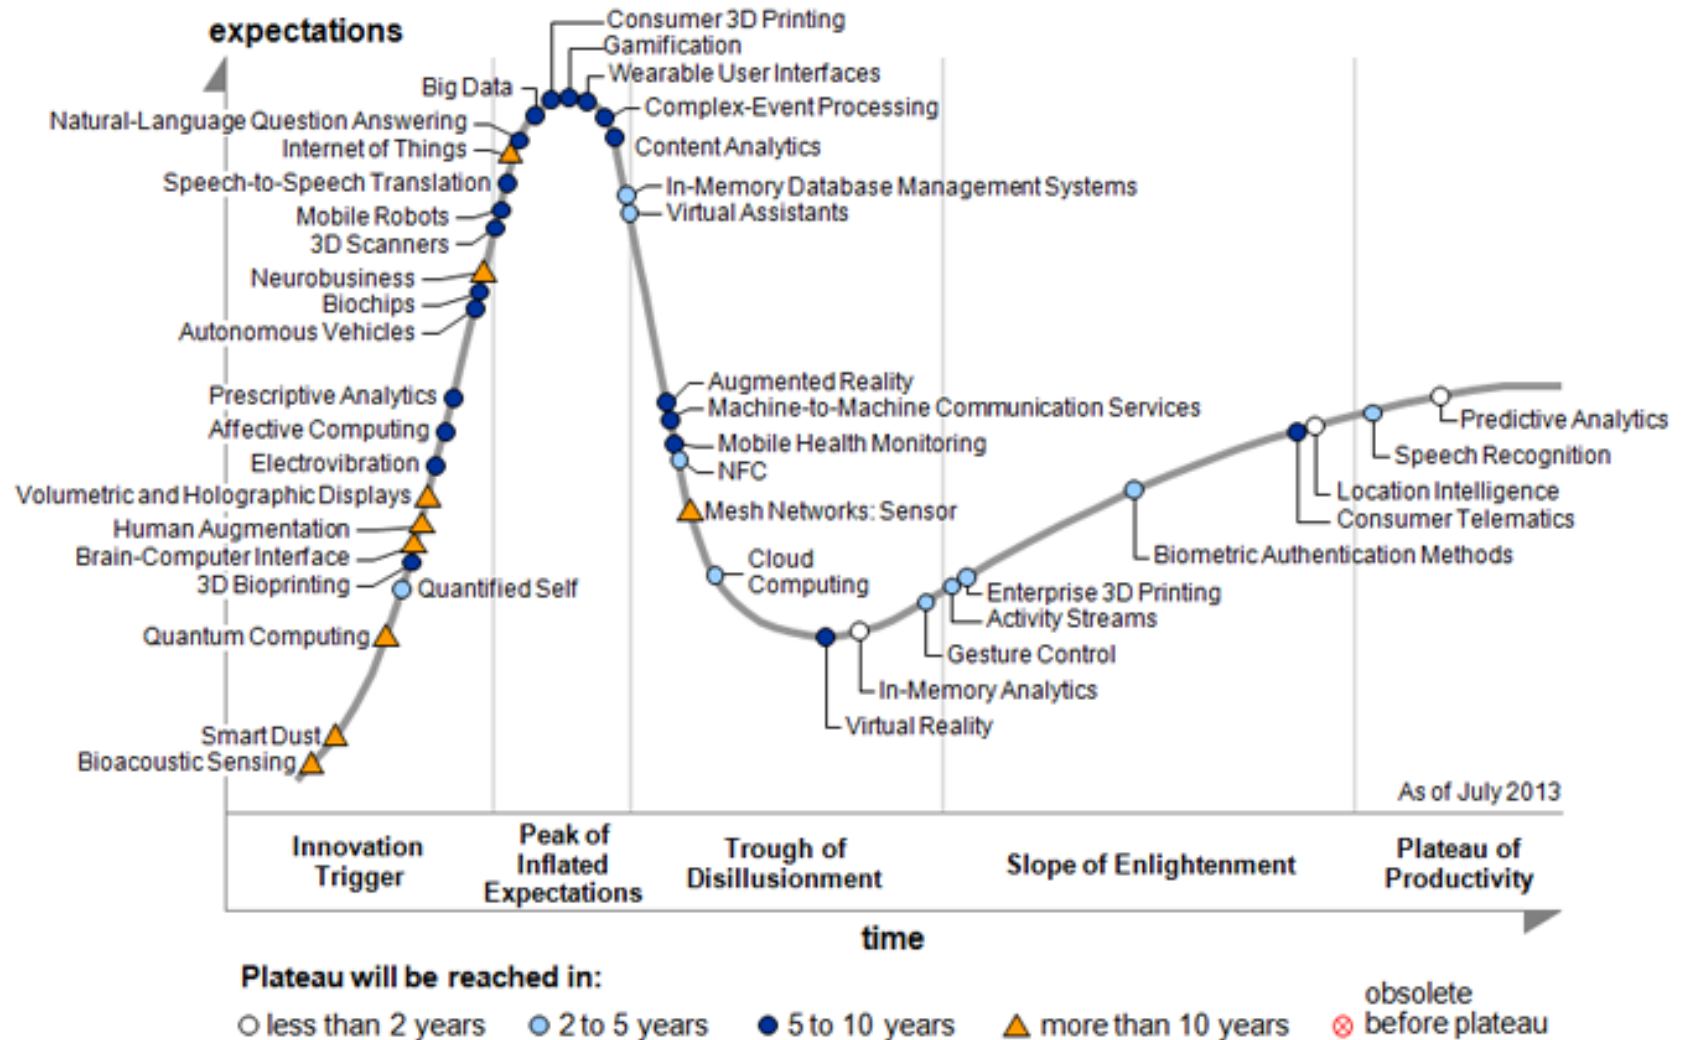


Hype Cycle : Gartner inc.



# Main machine manufacturer (metallic)

Technology	Manufacturer	Country
<b>Selective Laser Sintering</b>	3D Systems EOS Trump	USA Germany China
<b>Direct Metal Laser Sintering</b>	EOS	Germany
<b>Selective Laser Melting</b>	MTT (now 3D systems) Phenix System Concept Laser Realizer SLM Solutions Wuhan Binhu	UK France Germany Germany Germany China
<b>Electron Beam Melting</b>	Arcam	Sweden
<b>Direct Metal Deposition</b>	Optomec POM IREPA Laser Accufusion	USA USA France Canada

- Stereolithography (SLA) is the most widely used rapid prototyping technology. It can produce highly accurate and detailed polymer parts. It was the first rapid prototyping process, introduced in 1988 by 3D Systems, Inc., based on work by inventor Charles Hull.

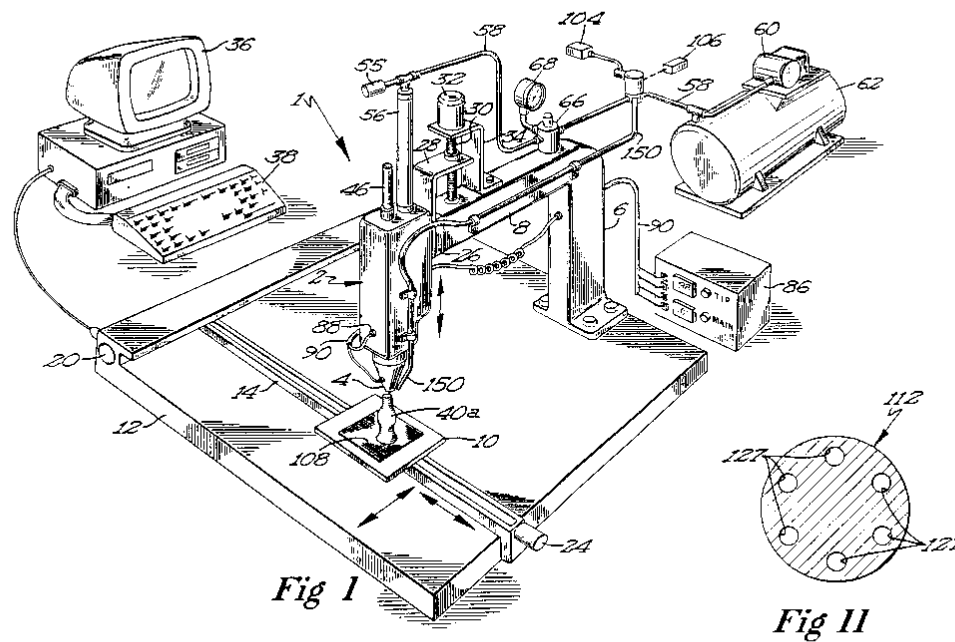

U.S. Patent


June 9, 1992

Sheet 1 of 3


5,121,329


U.S. Patent Sep. 17, 1996 Sheet 3 of 4 5,556,590

**Fig. 5**



**Fig. 6**




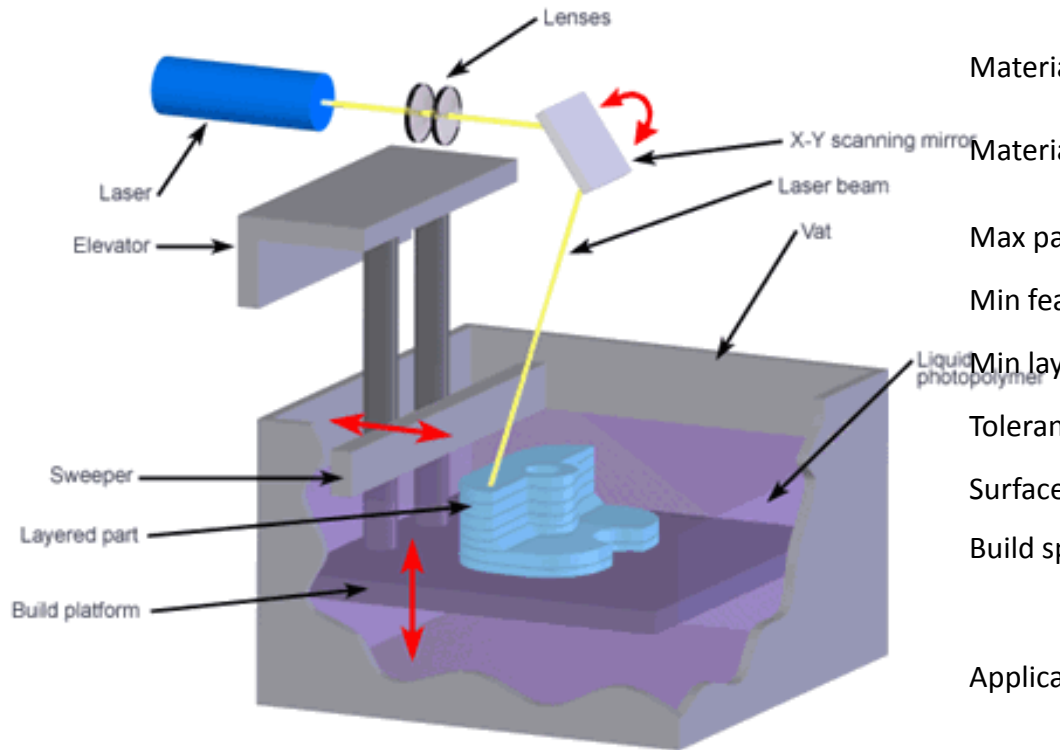


Material type:	Liquid (Photopolymer)
Materials:	Thermoplastics (Elastomers)
Max part size:	59.00 x 29.50 x 19.70 in.
Min feature size:	0.004 in.
Min layer thickness:	0.0010 in.
Tolerance:	0.0050 in.
Surface finish:	Smooth
Build speed:	Average
Applications:	Form/fit testing, Functional testing, Rapid tooling patterns, Snap fits, Very detailed parts, Presentation models, High heat applications

Copyright   2008 CustomPartNet




Copyright   GAGGIONE

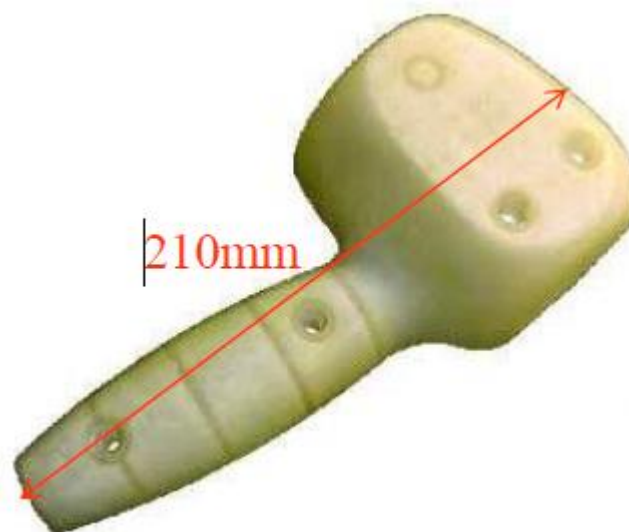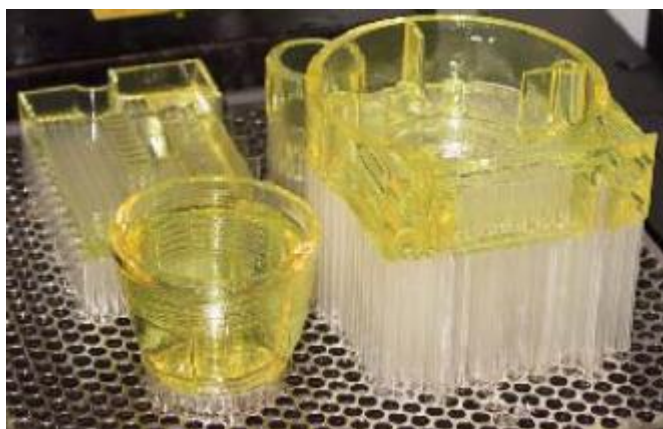





# Inkjet Powder

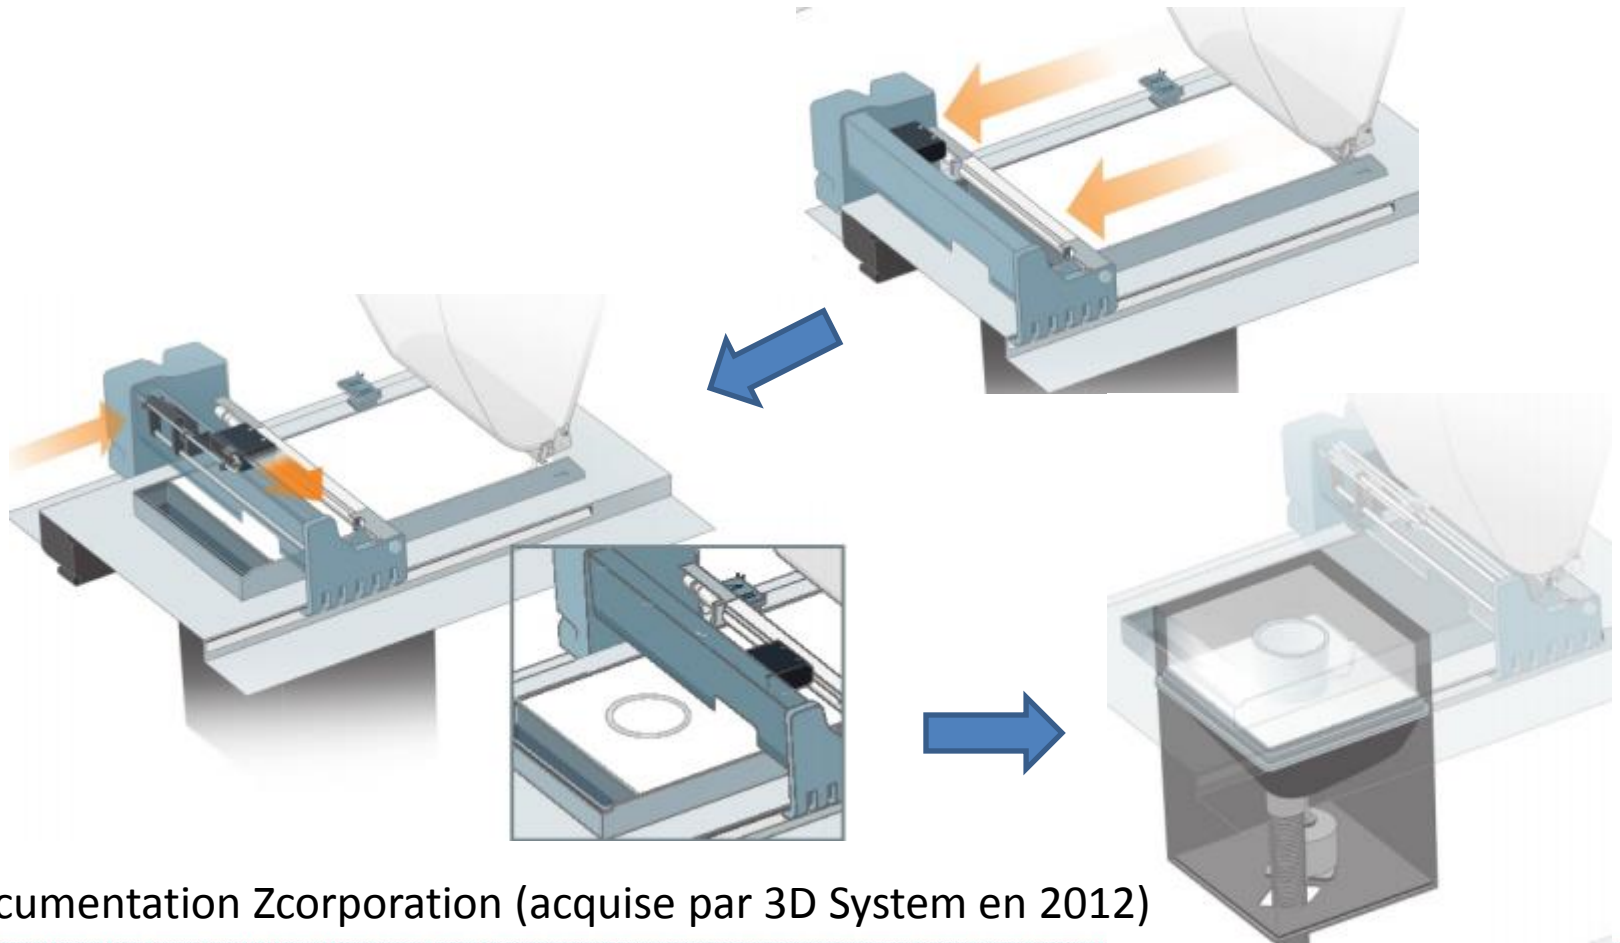

Documentation Zcorporation (acquise par 3D System en 2012)

# Inkjet Powder

- **Tore plat**


[lazarus –thibert]

3 niveaux de corrugations:

VRML 32M de triangles, 16M de points, 0.6GBytes


Zprinter Powder inkjet

Task : hollow part, fix model, adapt  
model precision

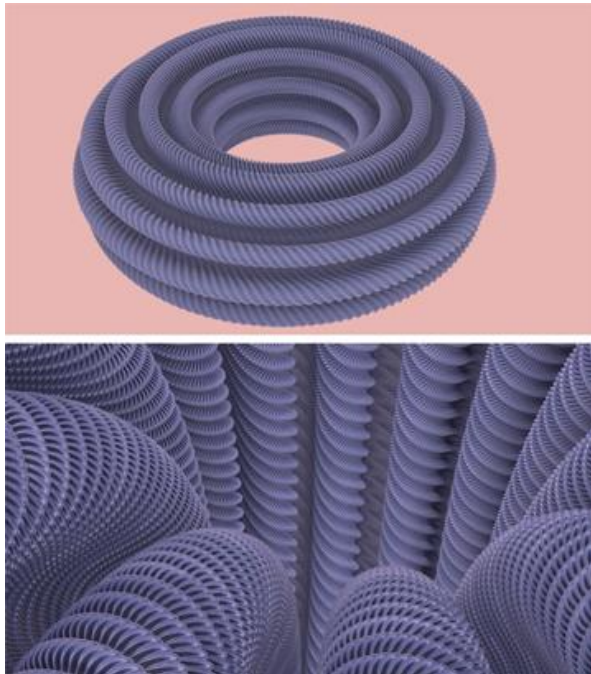

Images de synth se


5 niveaux de corrugation

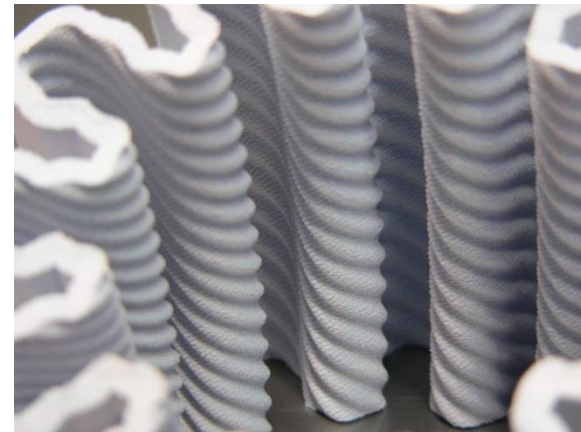


Method for 3D printing of highly complex geometries

The first “flat torus” printed in 3D – Henocque Ingegraph2013

- Selective Laser Sintering (SLS) was developed at the University of Texas in Austin, by Carl Deckard and colleagues. The technology was patented in 1989 and was originally sold by DTM Corporation. DTM was acquired by 3D Systems in 2001.**

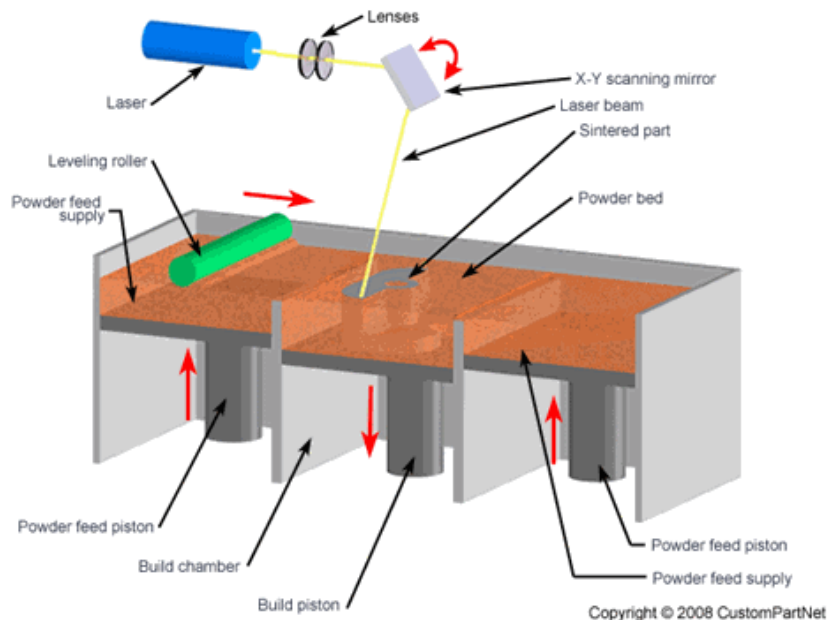


Material type:	Powder (Polymer)
Materials:	Thermoplastics such as Nylon, Polyamide, and Polystyrene; Elastomers; Composites
Max part size:	22.00 x 22.00 x 30.00 in.
Min feature size:	0.005 in.
Min layer thickness:	0.0040 in.
Tolerance:	0.0100 in.
Surface finish:	Average
Build speed:	Fast
Applications:	Form/fit testing, Functional testing, Rapid tooling patterns, Less detailed parts, Parts with snap-fits & living hinges, High heat applications

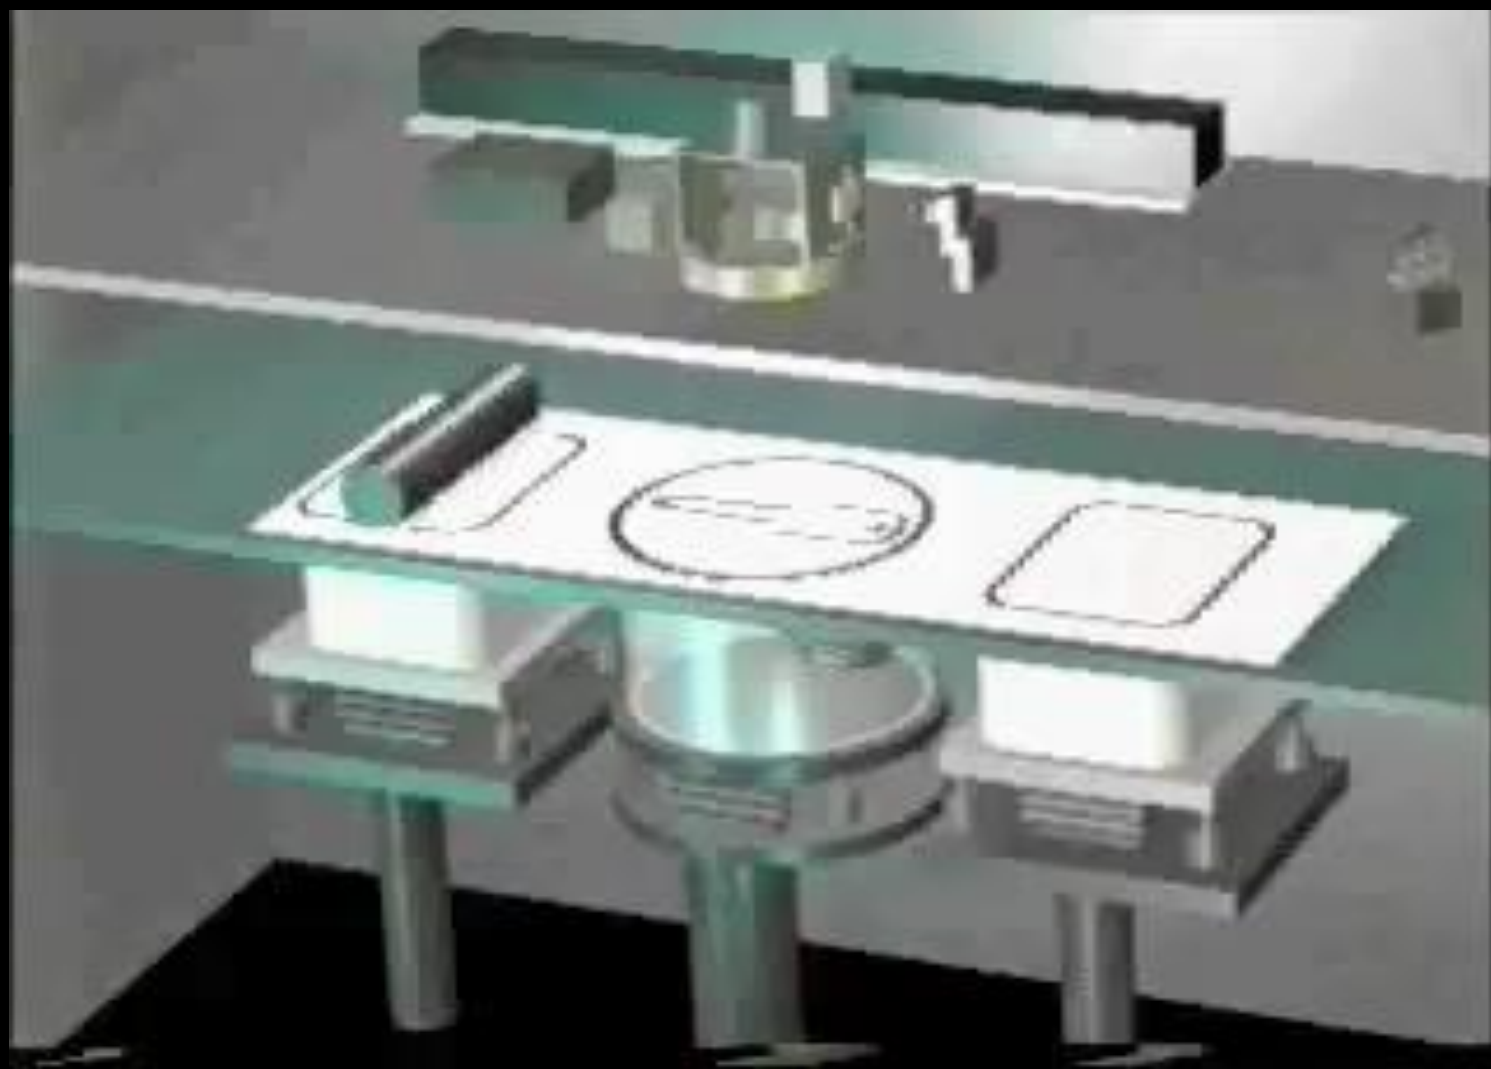



- Fused Deposition Modeling (FDM) was developed by Stratasys in Eden Prairie, Minnesota. In this process, a plastic or wax material is extruded through a nozzle that traces the part's cross sectional geometry layer by layer.**

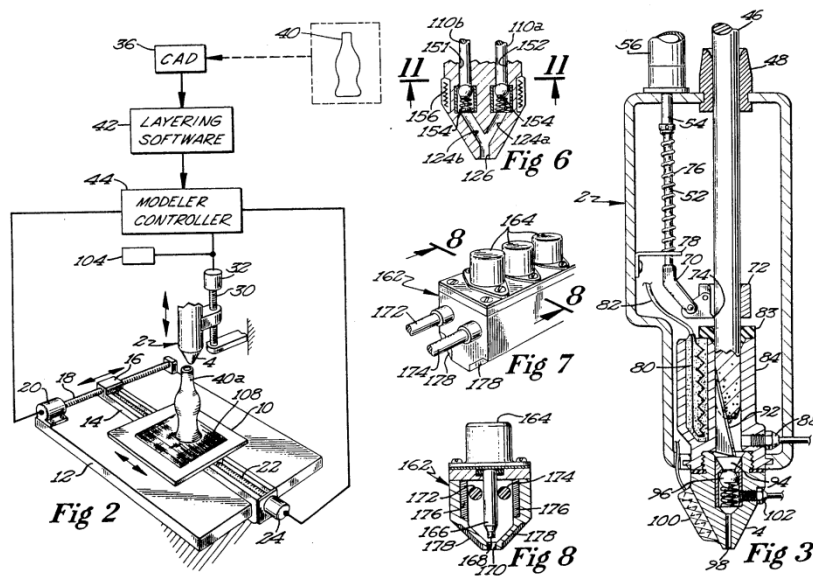


U.S. Patent

June 9, 1992

Sheet 2 of 3

5,121,329



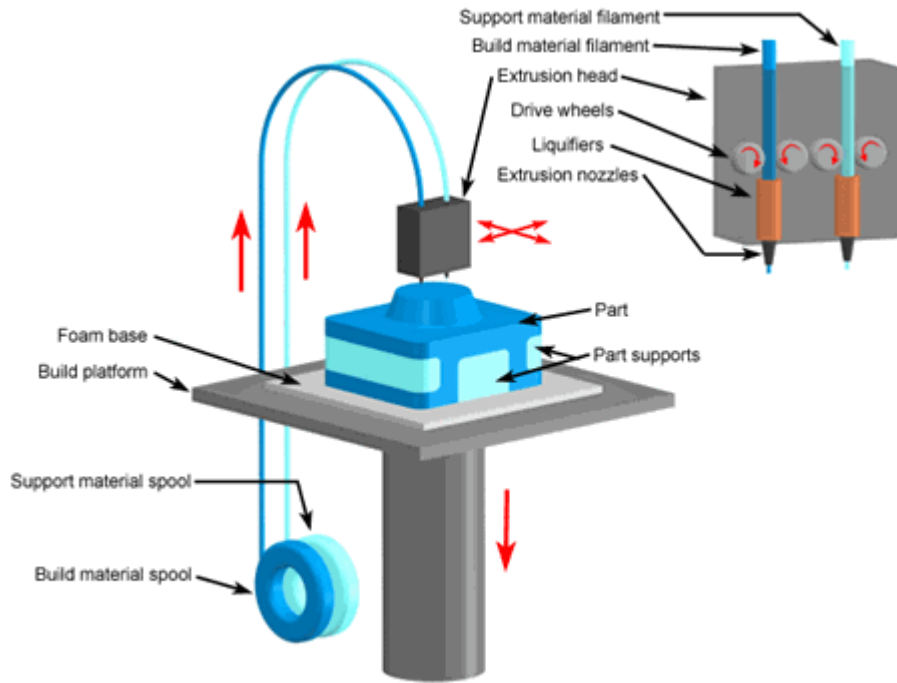

Copyright   2008 CustomPartNet

Material type:

Solid (Filaments)

Materials:

Thermoplastics such as ABS, Polycarbonate, and Polyphenylsulfone; Elastomers

Max part size:

36.00 x 24.00 x 36.00 in.

Min feature size:

0.005 in.

Min layer thickness:

0.0050 in.

Tolerance:

0.0050 in.

Surface finish:

Rough

Build speed:

Slow

Applications:


Form/fit testing, Functional testing, Rapid tooling patterns, Small detailed parts, Presentation models, Patient and food applications, High heat applications




3D Printing Stratasy

# Les technologies OpenSources r plicants

- **RepRap**

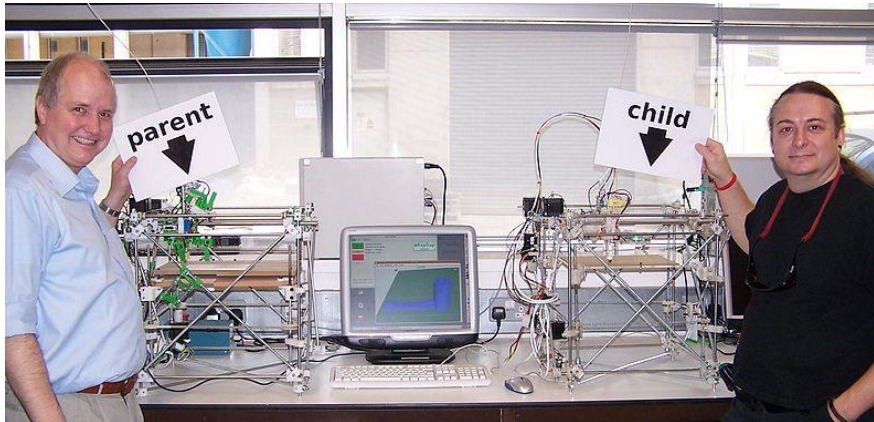

- D but du projet RepRap en 2005   l'universit  de Bath: Adrian Bowyer
- Travaux sur l'openSource des Produits
- Notion de R plication
- Projet Communautaire -> [reprap.org](http://reprap.org)

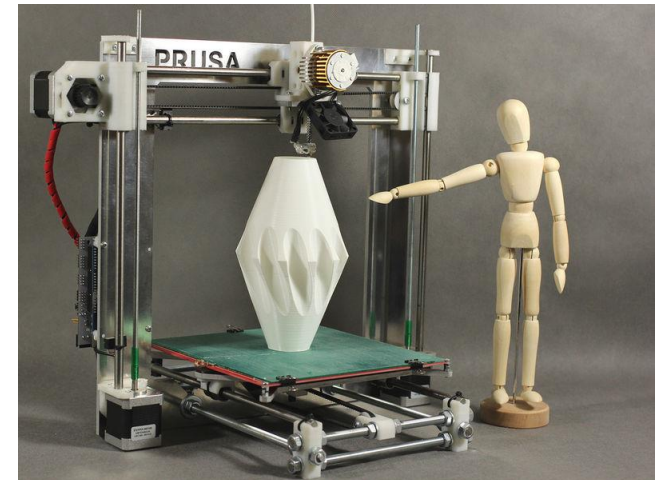



## Les imprimantes 3D



# Low Cost, High Quality


**Table 2**  
Printers used for specimen printing.

Number	Type	Filament
Printer 1	MOST RepRap	Natural ABS, Clear PLA
Printer 2	Lulzbot Prusa Mendel RepRap	Natural ABS, Purple PLA, White PLA
Printer 3	Prusa Mendel RepRap	Black PLA
Printer 4	Original Mendel RepRap	Natural PLA

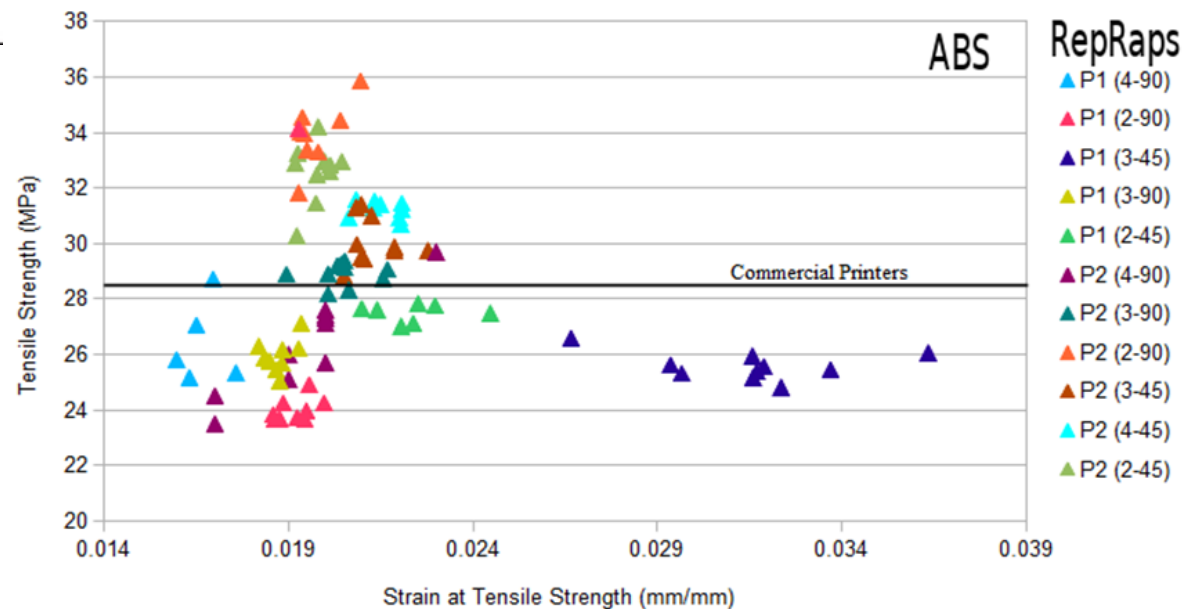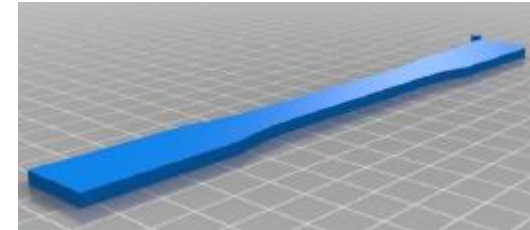

Mechanical Properties of components Fabricated with Open-Source 3-D Printers  
Under Realistic Environment Conditions : B.M. Tymrak, M. Kreiger and J.M. Pearce


- **Polyjet was developed by Objet Ltd in 1999 ( fusion stratasy 2012)**

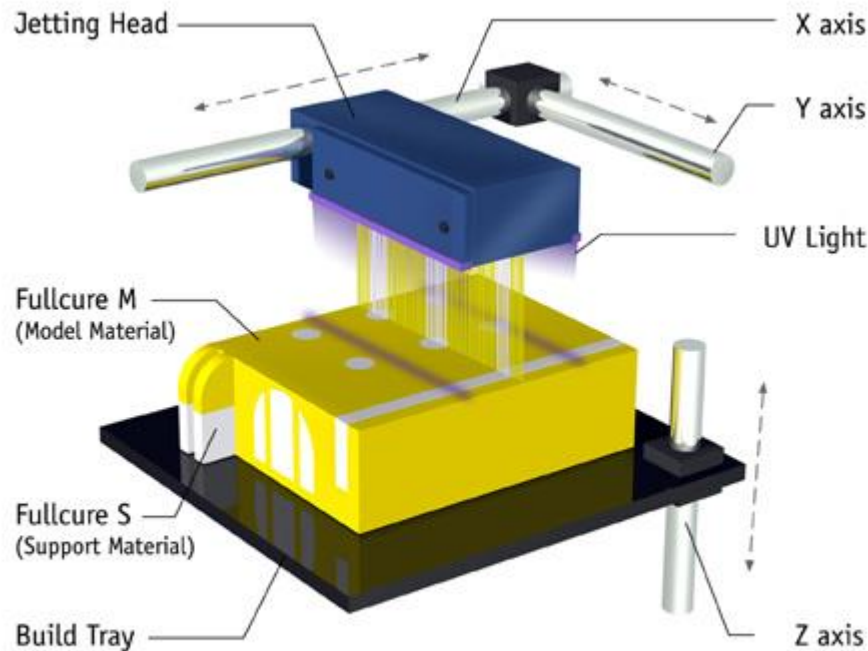

Is an additive fabrication process that produces models using photopolymer jetting

The Objet PolyJet Process


# Metallic particles binding mechanism

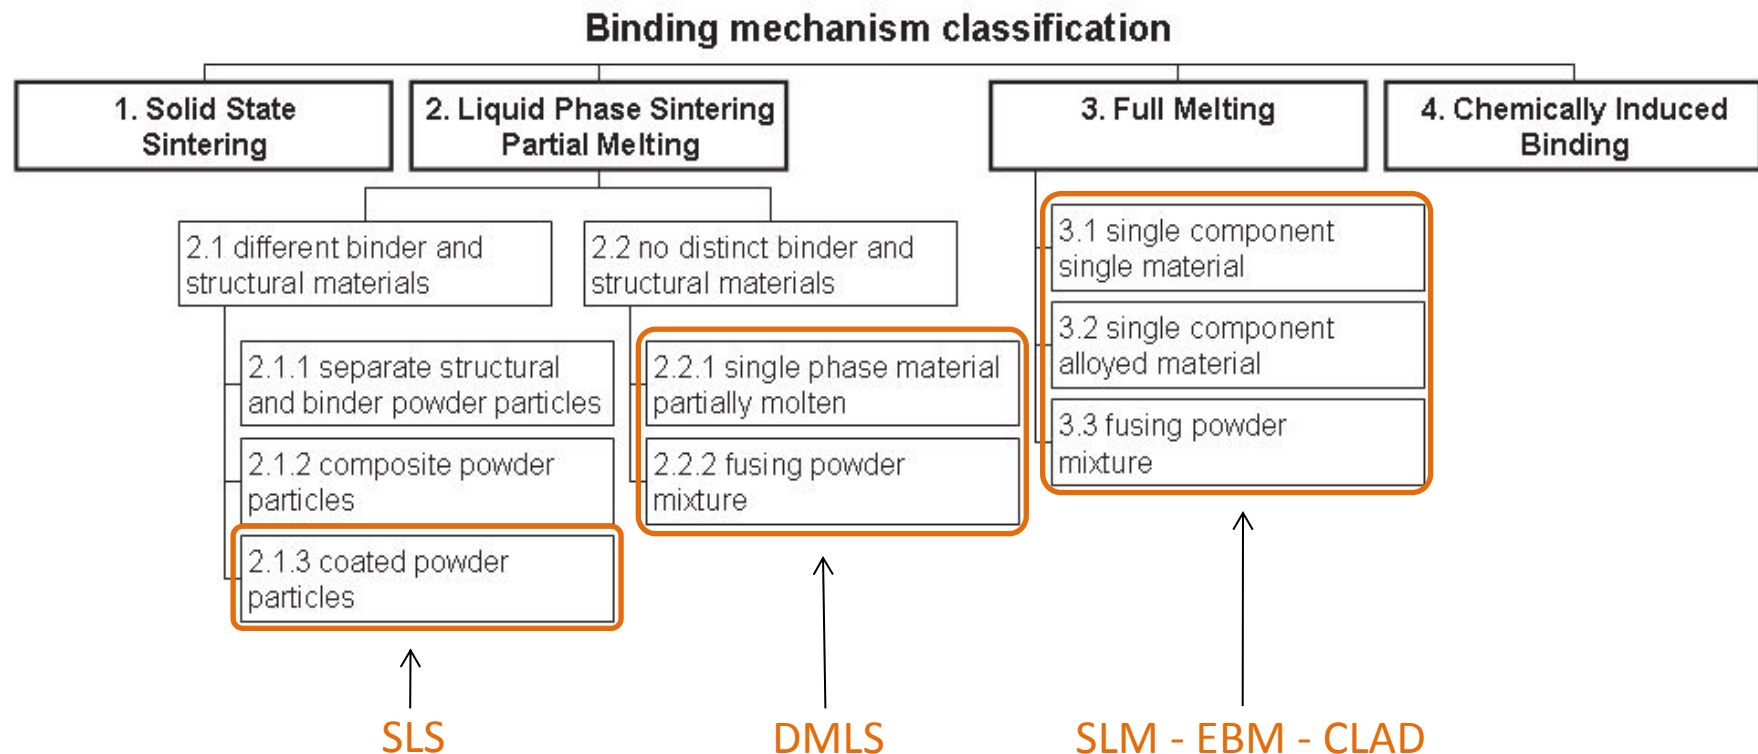


# Layer based additive manufacturing



The building tray is moved down

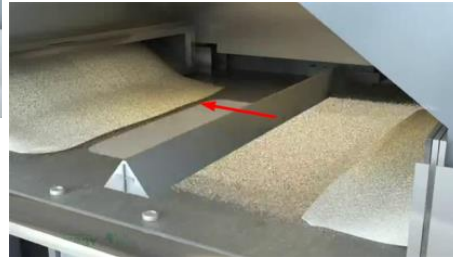


Deposition of a layer of powder

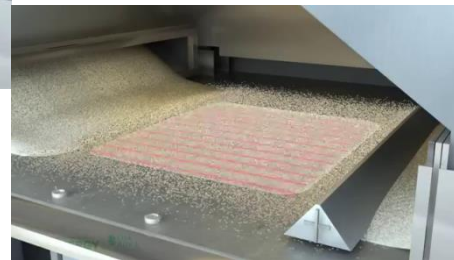

Consolidation of the powder




Energy is brought by the Electron beam to melt the particles

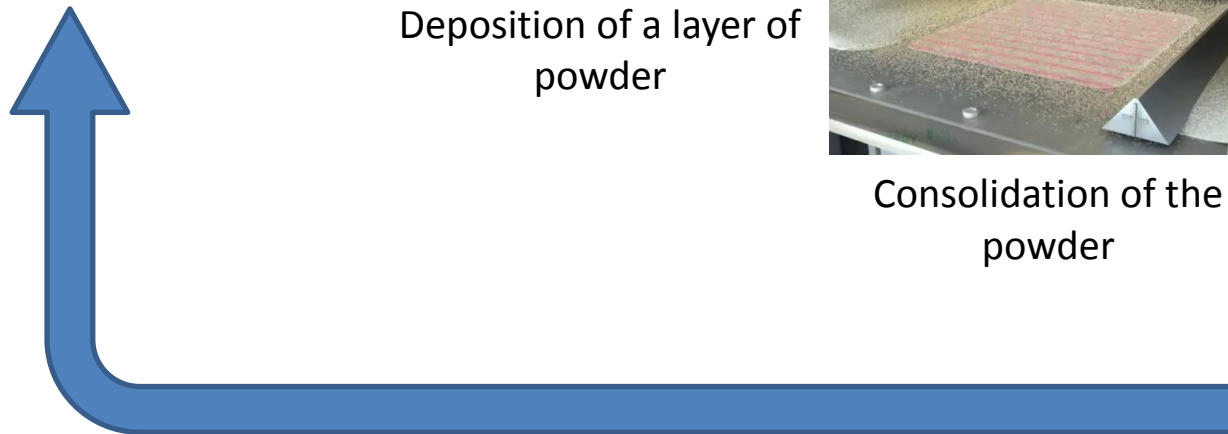




# Laser vs electron beam

- **Laser beam**
  - Selective Laser Sintering (SLS)
  - Direct Metal Laser Sintering (DMLS)
  - Selective Laser Melting (SLM)

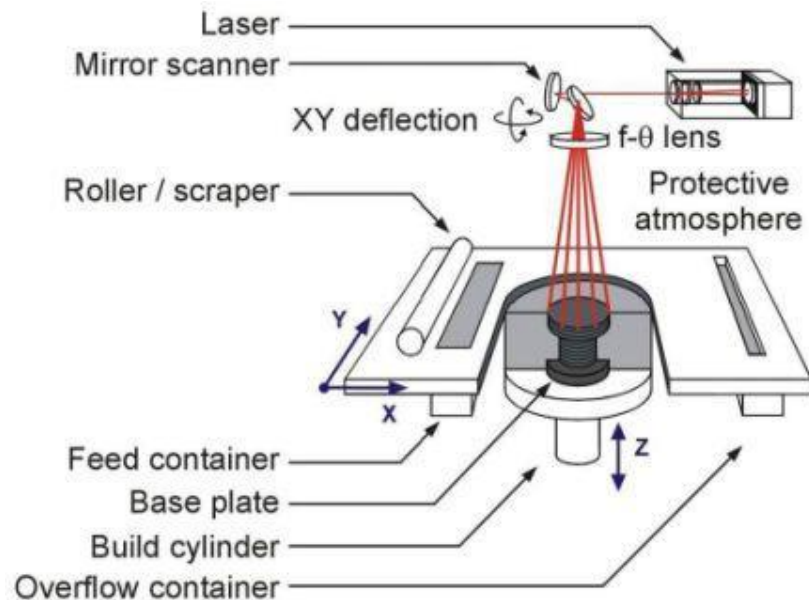


- **Electron beam**
  - Electron Beam Melting (EBM)

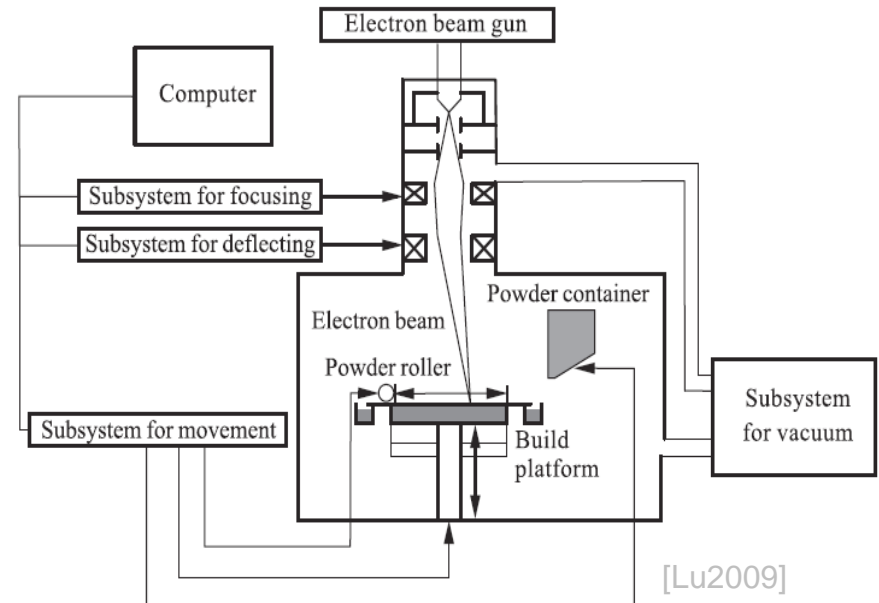

[Lu2009]



- **Direct Metal Laser Sintering (DMLS) was developed jointly by Rapid Product Innovations (RPI) and EOS GmbH, starting in 1994, as the first commercial rapid prototyping method to produce metal parts in a single process.**
- **With DMLS, metal powder (20 micron diameter), free of binder or fluxing agent, is completely melted by the scanning of a high power laser beam to build the part with properties of the original material.**

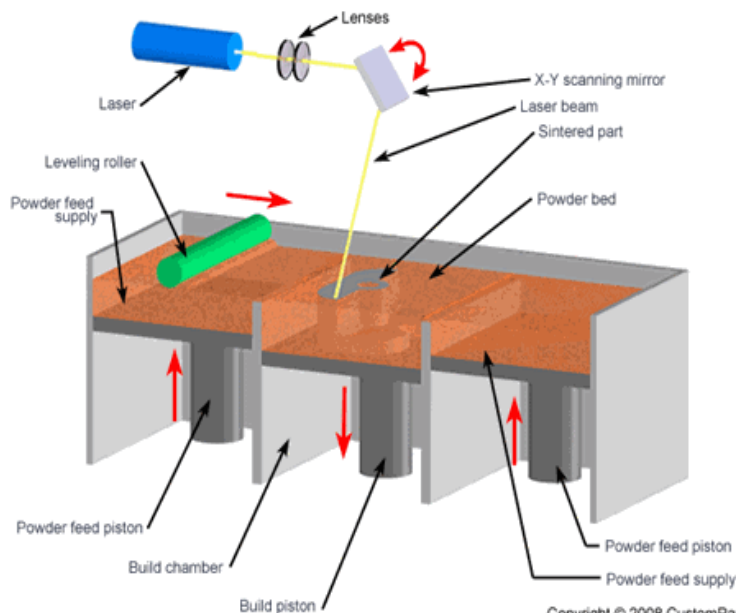

Material type: Powder (Metal)

Materials:

Ferrous metals such as Steel alloys, Stainless steel, Tool steel; Non-ferrous metals such as Aluminum, Bronze, Cobalt-chrome, Titanium; Ceramics

Max part size: 10.00 x 10.00 x 8.70 in.

Min feature size: 0.005 in.

Min layer thickness: 0.0010 in.

Tolerance: 0.0100 in.

Surface finish: Average


Build speed: Fast

Applications:

Form/fit testing, Functional testing, Rapid tooling, High heat applications, Medical implants, Aerospace parts



# Direct metal deposition

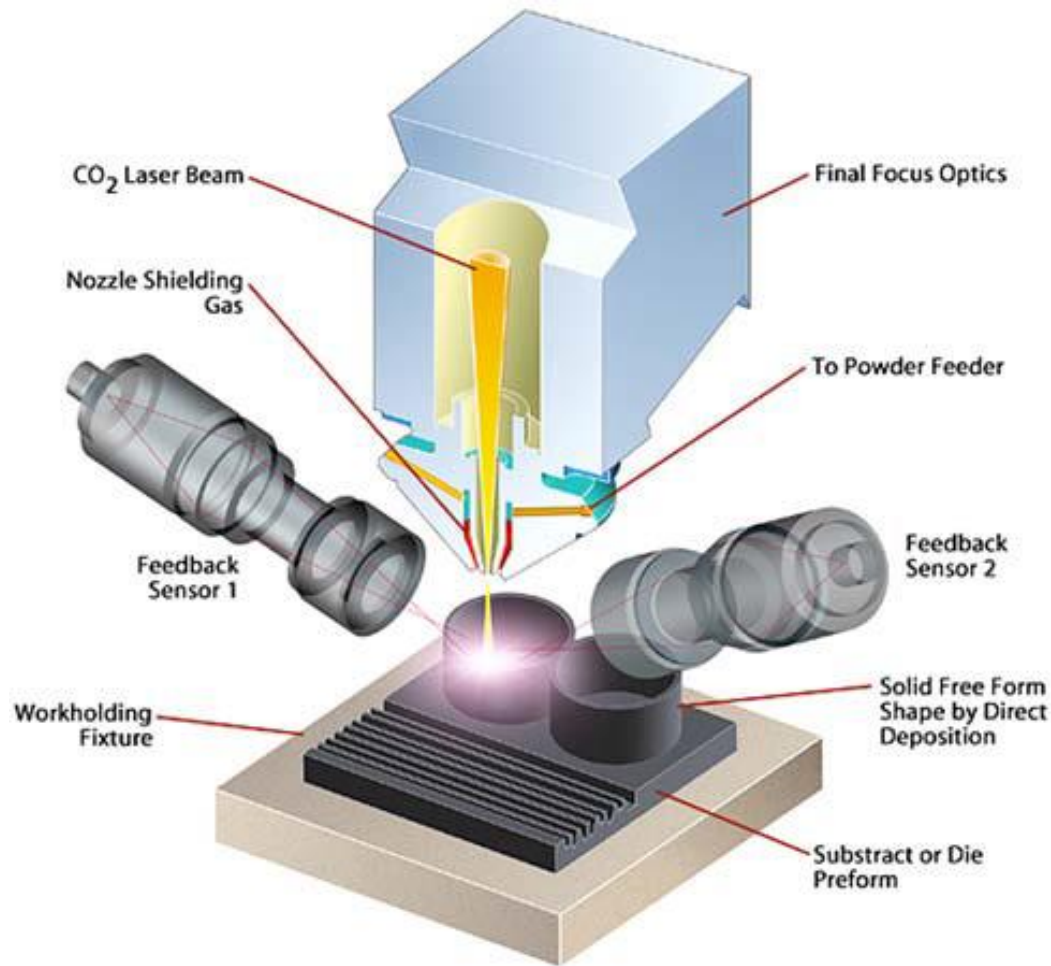

# Hybride – DMG MORI-SEIKI




**Vollautomatisches Einwechseln des Laserkopfes  
mit Pulverdüse via HSK-Schnittstelle**



# Industrial application


- Medical industry



Courtesy Materialise

hip endoprosthesis made  
of TA6V on EBM machine  
[Enztec]

dental prostheses  
SLM  
[Concept Laser]

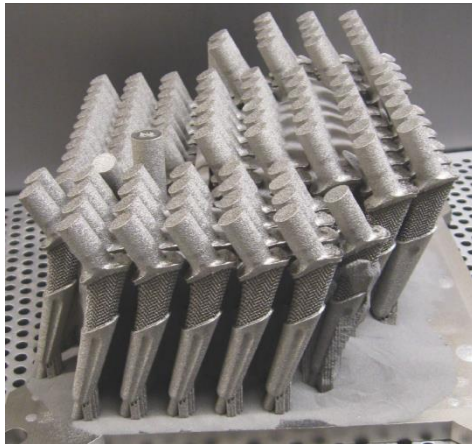


Additive manufacturing- the futur of production – AMT association manufacturing technology




# Industrial Application

- Airplane Industry**


Pipe  
[Northrop Grumman]

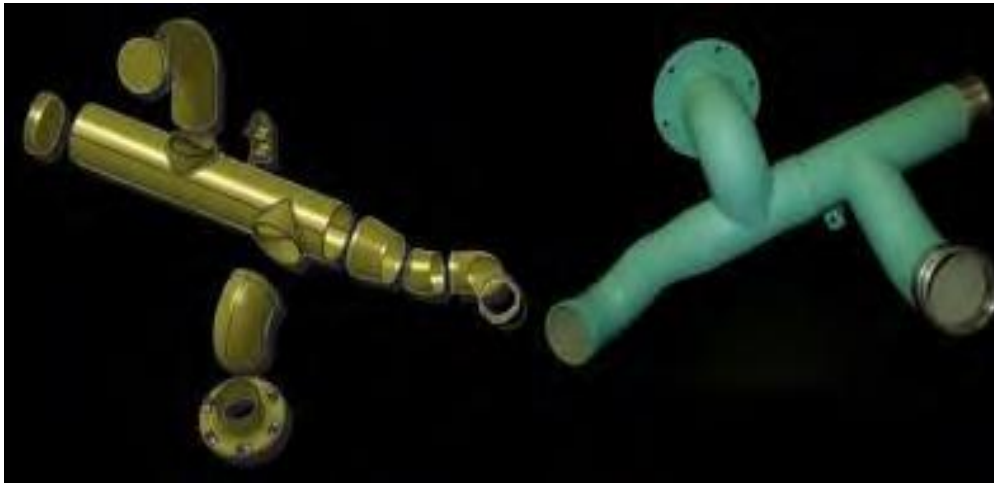

air duct  
[IRRCyN – IREPA Laser]

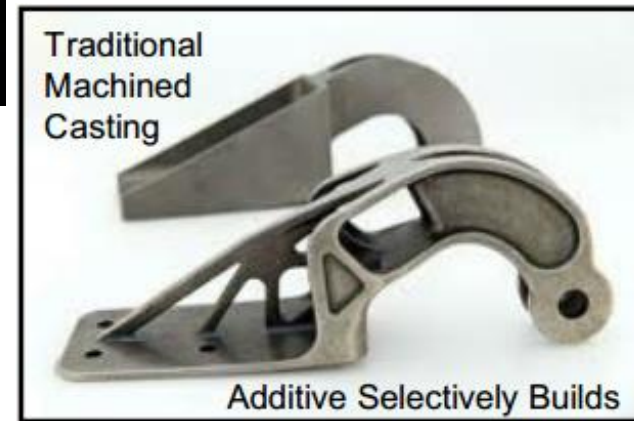




**Weight Reductions**

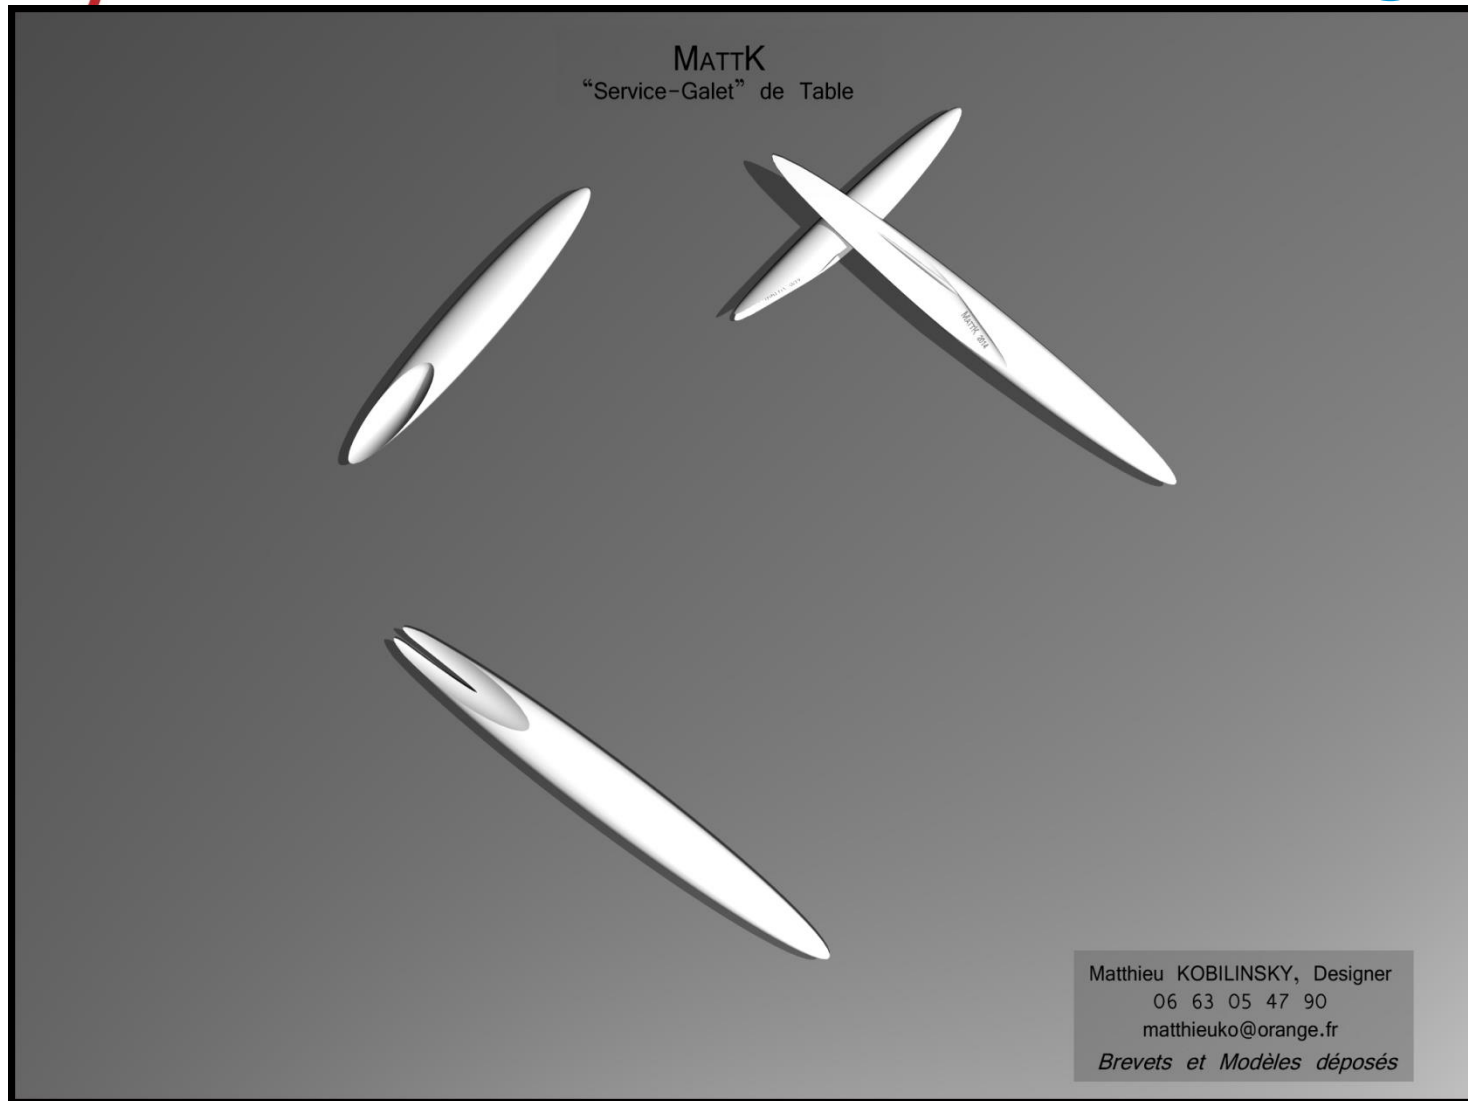







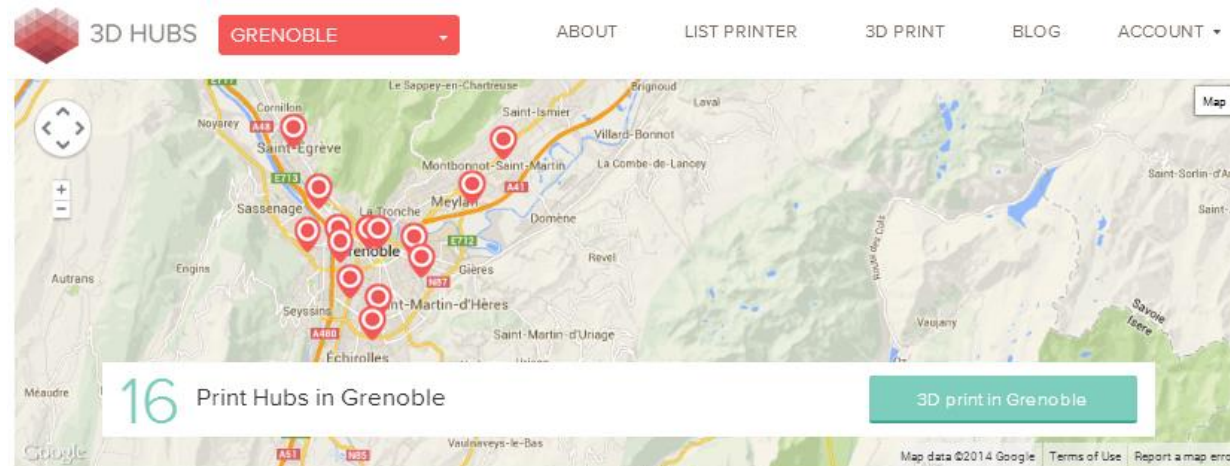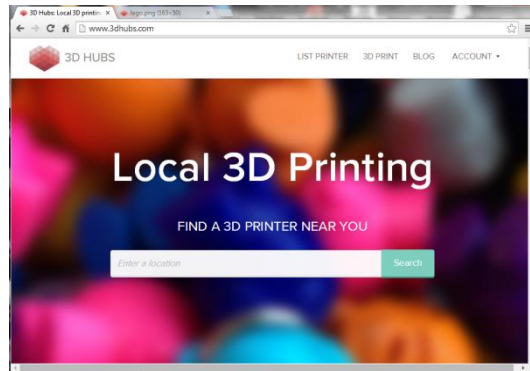

## La fabrication relocalisée

### Browse Local 3D Printers in Grenoble

#### Jean-Baptiste's Hub



★★★★★  
RepRap

#### Sebastien's Hub



★★★★★  
M2

#### improto3D's Hub



★★★★★  
Ultimaker 2, Replicator 2x,  
Replicator 2, M200

#### Pierrick's Hub



★★★★★  
Ultimaker 1

#### Steeve's Hub



★★★★★  
RepRap, Spiderbot, Other

#### Guy's Hub



★★★★★  
RepRap

#### gregory's Hub



★★★★★  
RepRap

#### Hugo's Hub



★★★★★  
Projet 660

#### Frédéric's Hub



★★★★★  
ORD Bot Hadron

#### DESSIER's Hub



★★★★★  
Mendel Prusa

#### Benjamin's Hub



★★★★★  
RepRap

#### pierre-marie's Hub



★★★★★  
RepRap

#### Nicolas's Hub



★★★★★  
Mendel Prusa

**Steeve**  
Community Mayor  
55 Makers  
16 Print Hubs

#### INVITE FRIENDS


Like 6 +1 Tweet

#### NEW HUBS

- Hugo's Hub
- DESSIER's Hub
- Sebastien's Hub
- Pierrick's Hub
- gregory's Hub

# Design issues


- **Design process**
  - Design requirements
  - Design rules
  - Shape optimisation
  - CAD for additive manufacturing
- **Manufacturing preparation**
  - Process simulation and optimisation
  - CAM for additive manufacturing

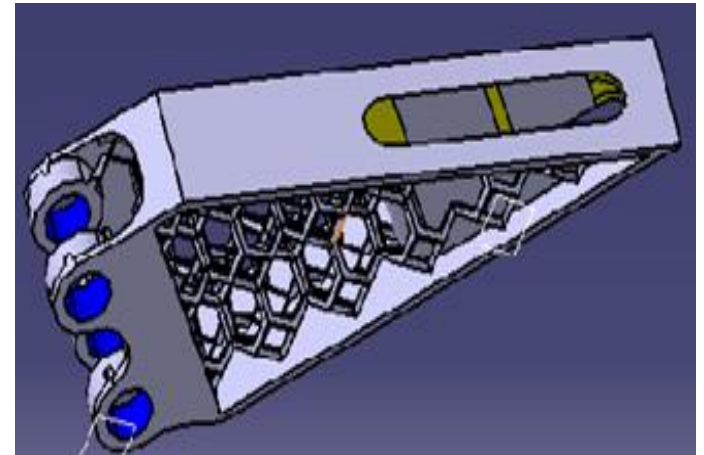

Contacts: [frederic.vignat@grenoble-inp.fr](mailto:frederic.vignat@grenoble-inp.fr)  
[francois.villeneuve@grenoble-inp.fr](mailto:francois.villeneuve@grenoble-inp.fr)


# Design for additive manufacturing

- Design process for additive manufacturing



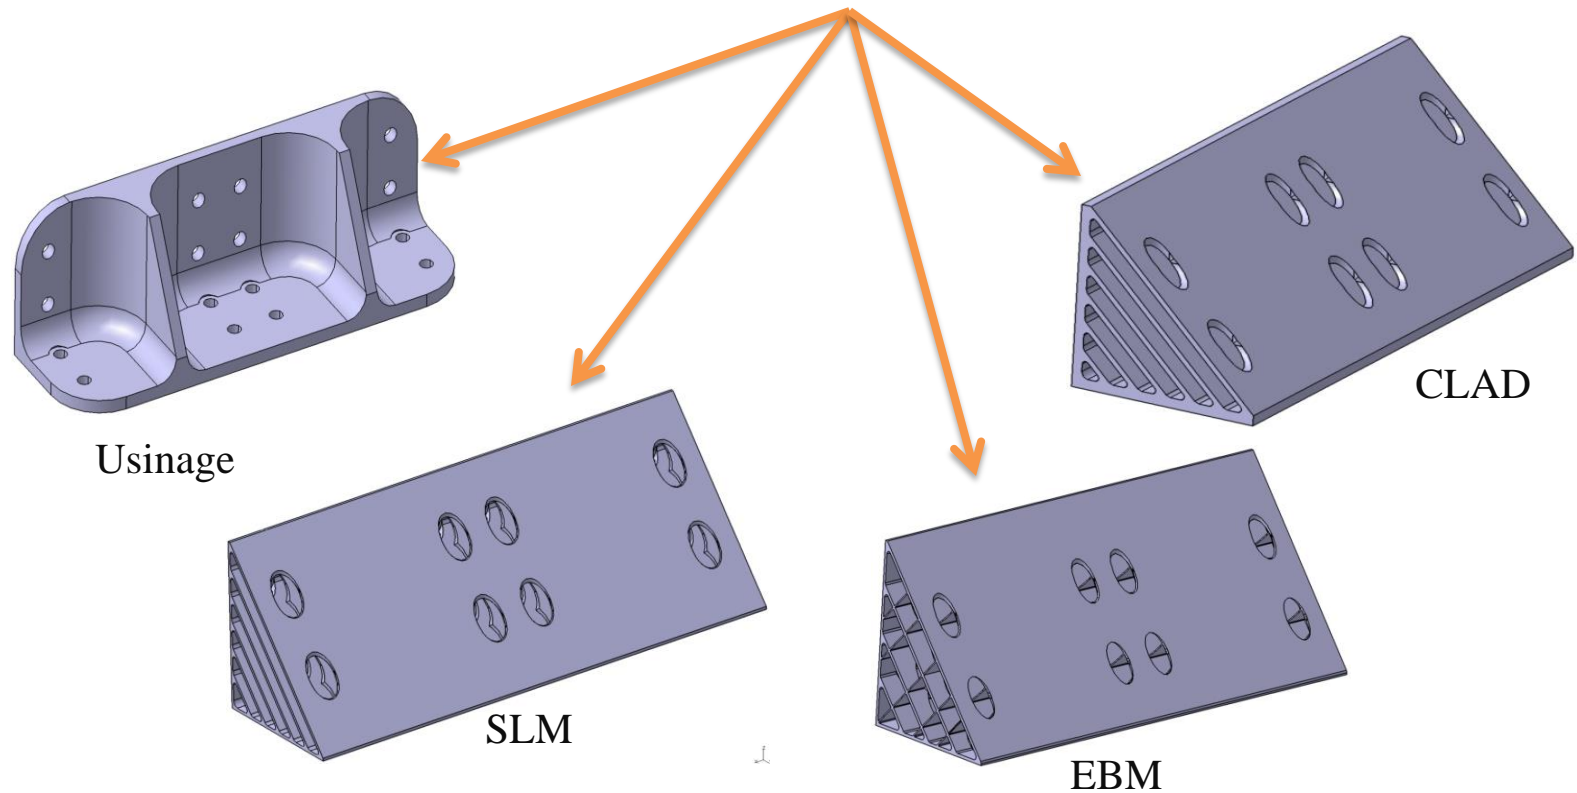




# Topological Optimization

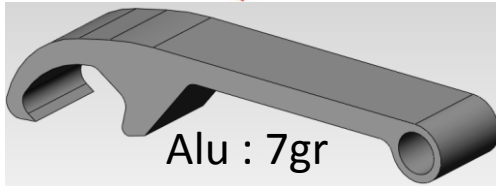

3.46 grams of Titanium alloy  
(density 4.2) with the logo –  
420MPa

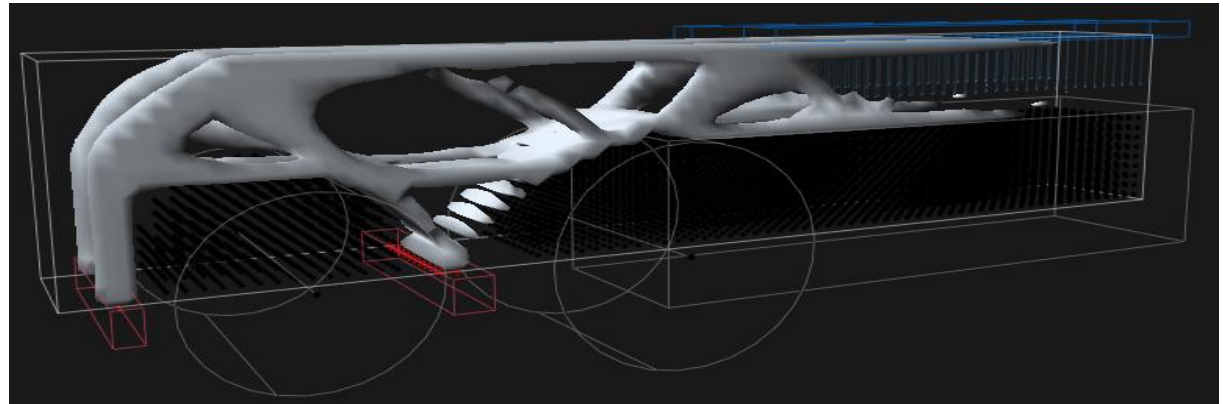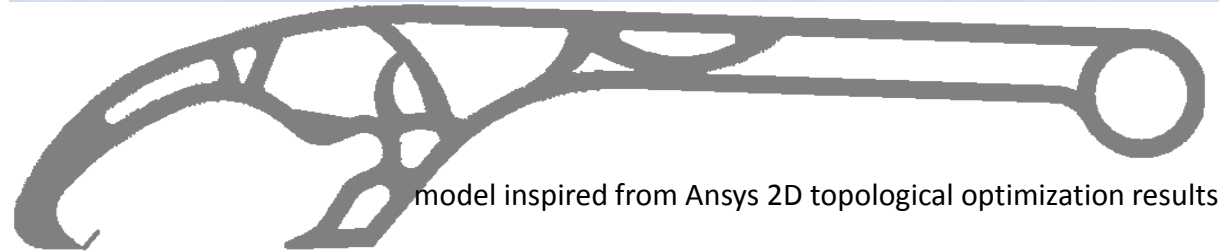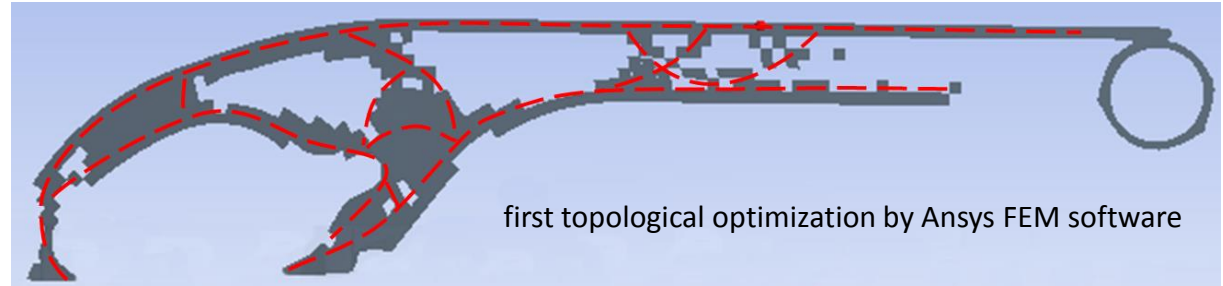


Material distribution in the width of the part - TopoStruc

Topological optimization: Ph Marin – G-Scop



# Finite element Calculation

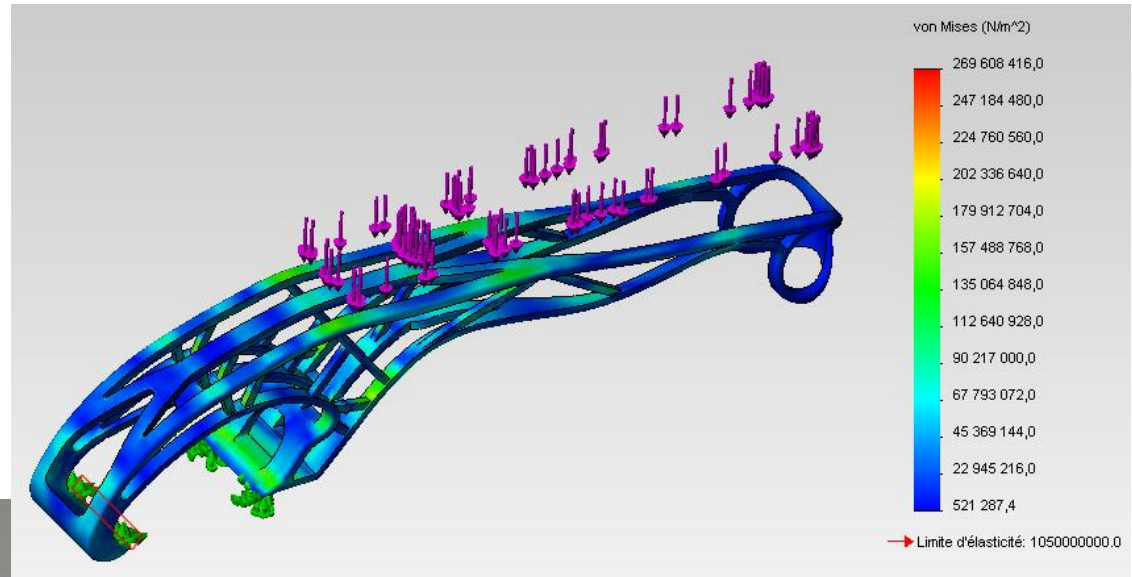


Titanium 2.1g, 270MPa

## Premier cadre de v lo m tallique imprim  en 3D et fabriqu  par Renishaw pour Empire Cycles



1. Mod le CAO de la tige  
de selle con u pour  
une pi ce coul e en  
alliages d'aluminium

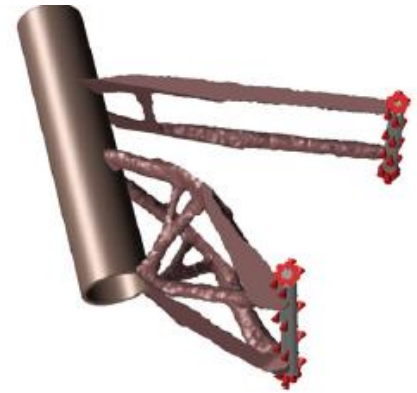

2. Optimisation  
topologique avec le  
logiciel solidThinking  
Inspire® 9.5 d'Altair



3. Conception revue par  
Empire Cycles utilisant  
le mod le CAO optimis   
comme gabarit



4. R alis  en alliages  
de titane sur une  
machine de fusion laser  
AM250 Renishaw

# Conclusion

- **Additive manufacturing will obviously take a large share of manufacturing processes**
- **It is a breakthrough in manufacturing technology**
- **Still a lot of research and development to be conducted to improve:**
  - Speed
  - Quality
  - Cost
  - Size of parts
- **Obviously an interesting technology from an environment point of view**
- **Need to be taken into account at design stage for optimal results**